



BlackBerry Curve 8900 Case Replacement

If the Blackberry phone case is cracked or broken and needs to be replaced.

Written By: Renae Bishop



INTRODUCTION

Your work area should be clean, lint-free, and with adequate lighting to visualize small print or parts.

The keypad and navigation ball may become loose and fall away from the motherboard, use caution so these items are not lost or damaged.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Case



- Remove the rear cover from the phone.
- Remove the battery.

Step 2



- Using a small plastic opening tool, remove the lower rear cover.

Step 3




- Remove six screws from the midframe of the device.

Step 4



- Remove the midframe from the phone.

Step 5

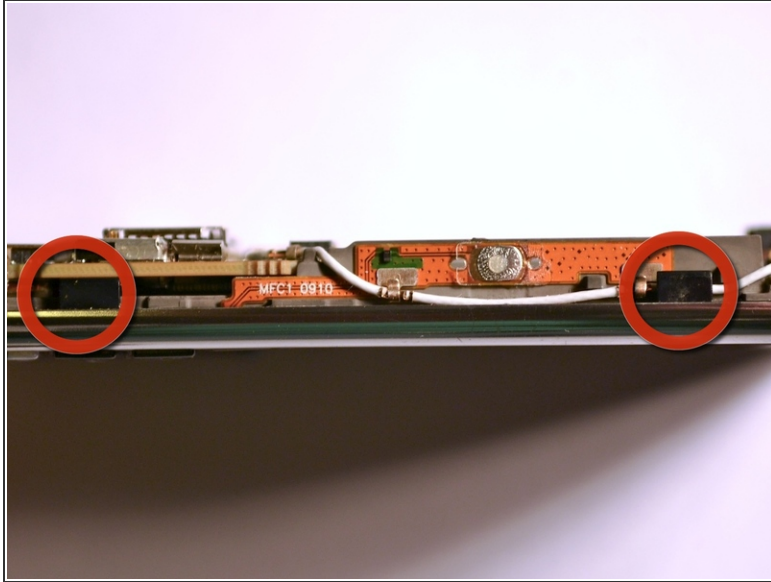

- Gently pry the back the plastic tabs that secure the motherboard to the case.
 - Slowly work your way around the case until the tabs until the motherboard comes free.
 - Remove the motherboard.
- ⓘ The keypad and navigation ball may become loose and fall away from the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-29 06:17:31 AM.